



PSP010N080HR

800V 10A 0.92Ω Si Single N-channel Planar MOSFET

Features

Si Single N-channel Planar MOSFET

- Rated to 800V at 10Amps @ $T_j = 25^\circ\text{C}$
- Max $R_{DS(on)} = 1.15 \Omega$
- Typ $R_{DS(on)} = 0.92 \Omega$
- Ultra Low Gate Charge(Typ. $Q_g=45 \text{ nC}$)
- Low C_{rss} (Typ. $C_{rss}=15 \text{ pF}$)
- Fast Switching Capability
- Avalanche Energy Specified
- Improved dv/dt Capability, High Ruggedness

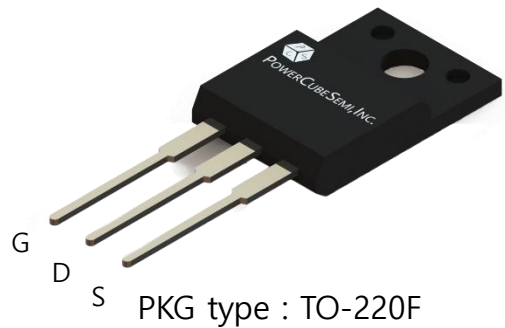

Absolute Maximum Ratings

Symbol	Parameter	Test Condition	Value	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	800	V
I_D	Drain Current	$T_c=25^\circ\text{C}$	10	A
I_{DM}	Pulsed Drain Current	Pulse width limited by junction temperature	40	A
V_{GS}	Gate-Source Voltage		± 30	V
E_{AS}	Single Pulsed Avalanche Energy		938	mJ
P_d	Power Dissipation	$T_c=25^\circ\text{C}$	60	W
T_j	Operating Junction Temperature		-55 to 150	$^\circ\text{C}$
T_{stg}	Storage Temperature		-55 to 150	$^\circ\text{C}$



Package Marking and Ordering Information

Device Marking	Device	Package	Packing Method	Tape width	Quantity
PSP010N080HR	PSP010N080	TO-220F	Tube	-	50 Unit

Electrical Characteristics of Si MOSFET

Symbol	Parameter	Test Condition	Numerical			Unit
			Min	Typ.	Max.	
BV_{DSS}	Drain-source breakdown voltage	$V_{GS} = 0V, I_D = 250\mu A, T_J = 25^\circ C$	800	-	-	V
I_{DSS}	Zero gate voltage drain current	$V_{DS} = 800V, V_{GS} = 0V$	-	-	1	μA
I_{GSS}	Gate-source leakage current	$V_{GS} = \pm 30V, V_{DS} = 0V$	-	-	± 100	nA
$V_{GS(th)}$	Gate threshold voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2	-	4	V
$R_{DS(ON)}$	Static drain-source on state resistance	$V_{GS} = 10V, I_D = 5A$	-	0.92	1.15	Ω
$t_{d(on)}$	Turn-on Delay time	$V_{DS} = 400V, I_D = 10A, R_G = 25\Omega$	-	27	-	ns
T_r	Turn-on Rise time		-	40	-	
$t_{d(off)}$	Turn-off Delay time		-	89	-	
T_f	Turn-off Fall time		-	43	-	

Electrical Characteristics of Si MOSFET


Symbol	Parameter	Test Condition	Numerical		Unit
			Typ.	Max.	
$R_{\theta JC}$	Thermal resistance, Junction to case		2.02	-	$^{\circ}\text{C}/\text{W}$
C_{iss}	Input capacitance	$V_{DS} = 25\text{V}, V_{GS} = 0\text{V}, f = 1.0\text{MHz}$	1626	-	pF
C_{oss}	Output capacitance		151	-	
C_{rss}	Reverse transfer capacitance		6.5	-	
$Q_{g(tot)}$	Total gate charge	$V_{DS} = 640\text{V}, I_D = 10\text{A}$ $V_{GS(on)} = 10\text{V}$	33	-	nC
Q_{gs}	Gate to source gate charge		8.6	-	
Q_{gd}	Gate to drain "Miller" charge		13	-	

Electrical Characteristics of Si Diode

Symbol	Parameter	Test Condition	Numerical		Unit
			Typ.	Max.	
I_S	Maximum continuous drain to source diode forward current		-	10	A
I_{SM}	Maximum pulsed drain to source diode forward current		-	40	A
V_{SD}	Drain to source diode forward voltage	$I_S = 10\text{A}, V_{GS} = 0\text{V}$	-	1.4	V
T_{rr}	Reverse recovery time	$V_{GS} = 0\text{V}, I_S = 10\text{A}, di_f/dt = 100\text{A}/\mu\text{s}$	730	-	ns
Q_{rr}	Reverse recovery charge		10.9	-	μC



Package Outline

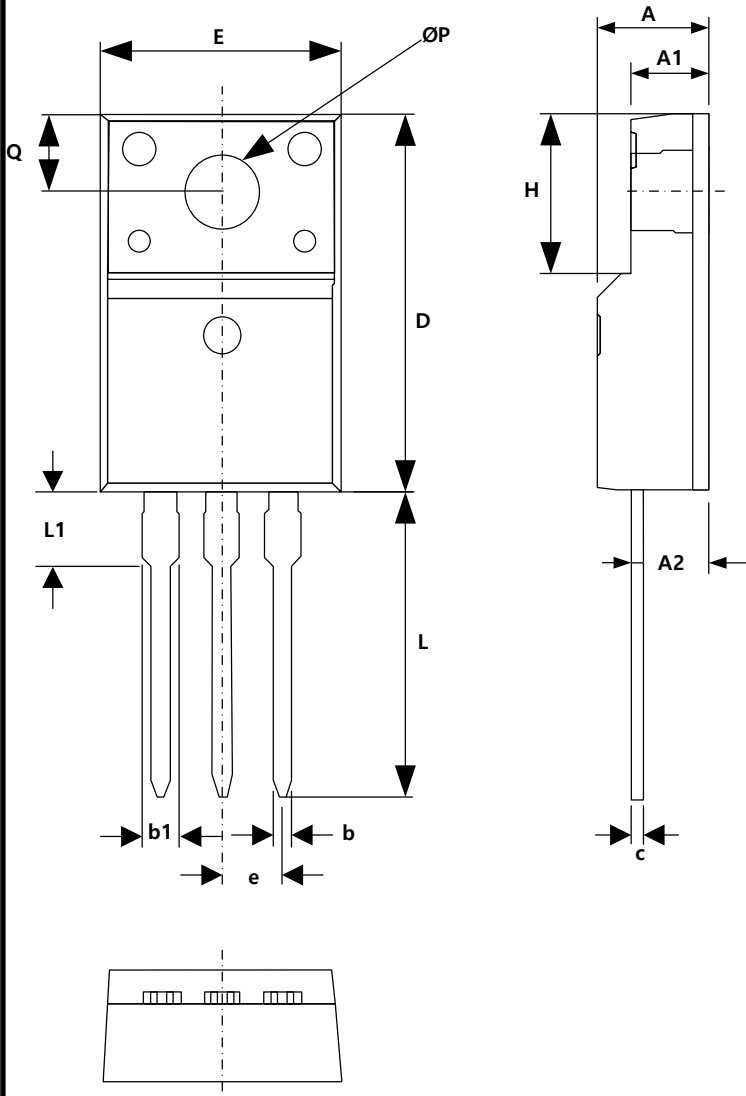

[Unit : mm]

SYMBOL	DIMENSIONS		NOTES
	MIN	MAX	
A	4.50	4.90	
A1	2.34	2.74	
A2	2.56	2.96	
b	0.70	0.90	
b1	1.27	1.47	
c	0.45	0.60	
D	15.67	16.07	
E	9.96	10.36	
e	2.54 BSC		
H	6.48	6.88	
L	12.68	13.28	
L1	3.03	3.43	
ϕP	3.08	3.28	
Q	3.20	3.40	