

PM012N100DG

100V 60A 12mΩ Si Single N-ch Enhancement Mode Power MOSFET with Normal Diode


Features

Si Single N-ch Enhancement Mode Power MOSFET


- Rated to 100V at 60Amps @ $T_j = 25^{\circ}\text{C}$
- Max $R_{DS(on)} = 12\text{ m}\Omega$
- Typ $R_{DS(on)} = 9.5\text{ m}\Omega$
- Gate Charge(Typ. $Q_g=18\text{ nC}$)
- 100% Avalanche Tested

Application

- Power switch
- DC/DC Converter

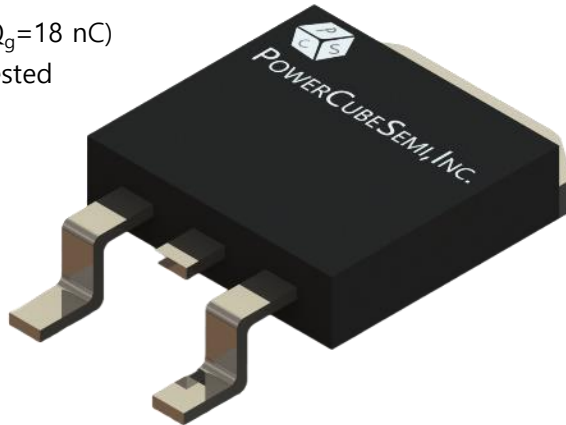

PKG type : TO-263(D2PAK)



Description

The PM012N100DG uses advanced trench Technology to provide excellent $R_{DS(ON)}$, low gate charge. it can be used in a wide variety of applications.

Absolute Maximum Ratings

Symbol	Parameter	Test Condition	Value	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	100	V
I_D	Drain Current	$T_c=25^{\circ}\text{C}$	60	A
I_{DM}	Pulsed Drain Current	Pulse width limited by junction temperature	240	A
V_{GS}	Gate-Source Voltage		± 20	V
E_{AS}	Single Pulsed Avalanche Energy	$V_{DD}=50V, V_{GS}=10V, L=0.5mH, R_G=25\Omega$	43	mJ
P_d	Power Dissipation	$T_c=25^{\circ}\text{C}$	73.5	W
T_j	Operating Junction Temperature		150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature		-55 to 150	$^{\circ}\text{C}$

Package Marking and Ordering Information

Device Marking	Device	Package	Packing Method	Tape width	Quantity
PM012N100DG	PM012N100	TO-263	REEL	-	800

Electrical Characteristics of Si MOSFET

Symbol	Parameter	Test Condition	Numerical			Unit
			Min	Typ.	Max.	
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A, T_J = 25^\circ C$	100	-	-	V
I_{DSS}	Zero gate voltage drain current	$V_{DS} = 100V, V_{GS} = 0V$	-	-	1	μA
I_{GSS}	Gate-source leakage current	$V_{GS} = \pm 20V, V_{DS} = 0V$	-	-	± 100	nA
$V_{GS(th)}$	Gate threshold voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	3.0	4.0	V
$R_{DS(ON)}$	Static drain-source on state resistance	$V_{GS} = 10V, I_D = 20A$	-	9.5	12	m Ω
g_{FS}	Forward transconductance	$V_{DS} = 5V, I_D = 20A$	-	35	-	S
$t_{d(on)}$	Turn-on Delay time	$V_{DD} = 50V, I_D = 20A, R_G = 1.6\Omega$	-	8	-	ns
T_r	Turn-on Rise time		-	14	-	
$t_{d(off)}$	Turn-off Delay time		-	12	-	
T_f	Turn-off Fall time		-	3	-	



Electrical Characteristics of Si MOSFET

Symbol	Parameter	Test Condition	Numerical		Unit
			Typ.	Max.	
$R_{\theta JC}$	Thermal resistance, Junction to case		1.7	-	$^{\circ}\text{C}/\text{W}$
C_{iss}	Input capacitance	$V_{DS} = 50\text{V}, V_{GS} = 0\text{V},$ $f = 1.0\text{MHz}$	1222	-	pF
C_{oss}	Output capacitance		457	-	
C_{rss}	Reverse transfer capacitance		24	-	
$Q_{g(\text{tot})}$	Total gate charge at 10V	$V_{DS} = 50\text{V}, I_D = 20\text{A}$ $V_{GS(\text{on})} = 10\text{V}$	18	-	nC
Q_{gs}	Gate to source gate charge		6	-	
Q_{gd}	Gate to drain "Miller" charge		3.8	-	

Electrical Characteristics of Si Diode

Symbol	Parameter	Test Condition	Numerical		Unit
			Typ.	Max.	
I_S	Maximum continuous drain to source diode forward current		-	60	A
V_{SD}	Drain to source diode forward voltage	$I_S = 20\text{A}, V_{GS} = 0\text{V}$	-	1.2	V
T_{rr}	Reverse recovery time	$I_F = 20\text{A}, V_{GS} = 0\text{V},$ $di_F/dt = 100\text{A}/\mu\text{s}$	24	-	ns
Q_{rr}	Reverse recovery charge		128	-	nC

Typical Characteristics

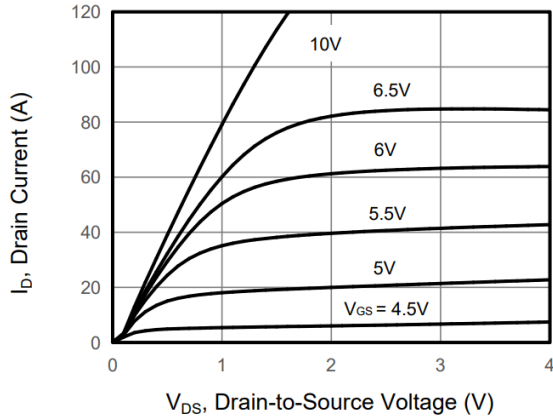


Figure 1. Output Characteristics

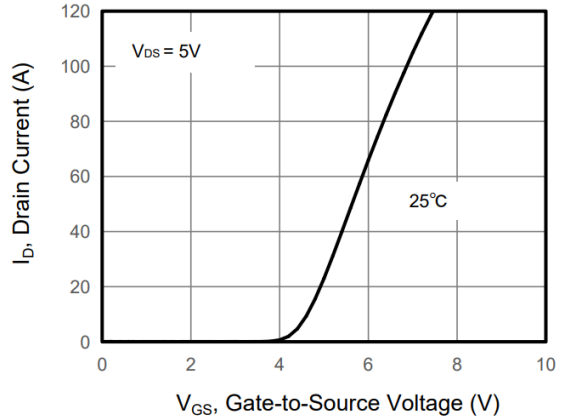


Figure 2. Transfer Characteristics

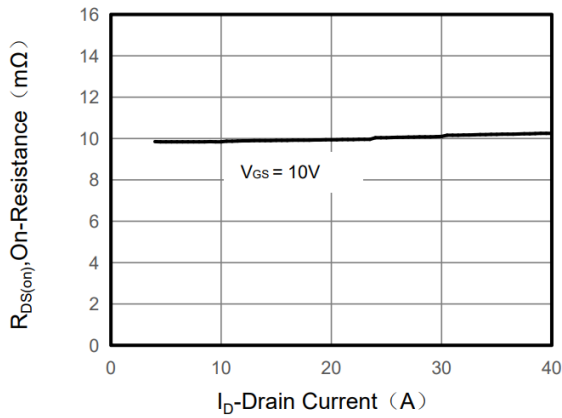


Figure 3. Drain to Source On-Resistance

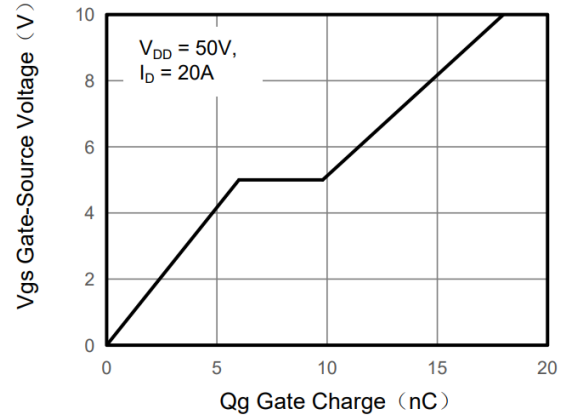


Figure 4. Gate Charge

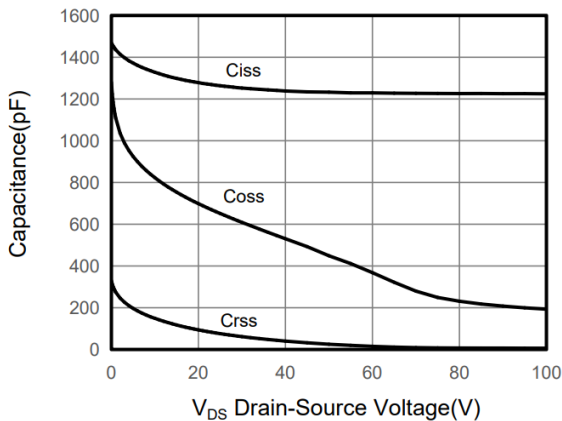


Figure 5. Capacitance Characteristics

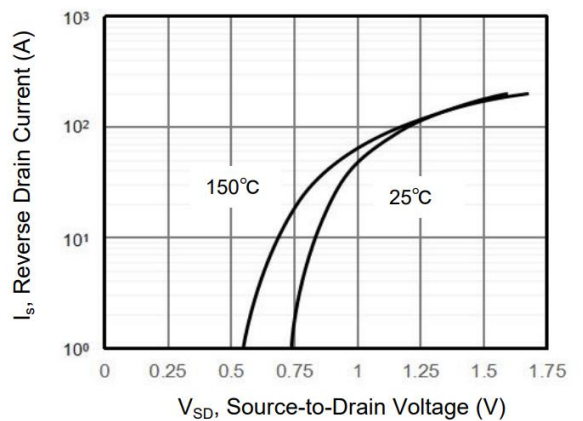


Figure 6. Source to Drain Diode Forward

Typical Characteristics

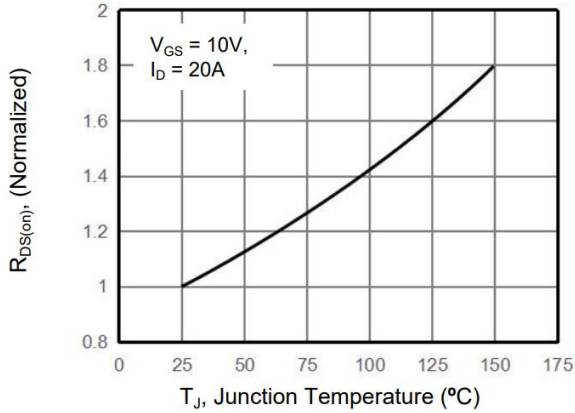


Figure 7. Drain to Source On-Resistance

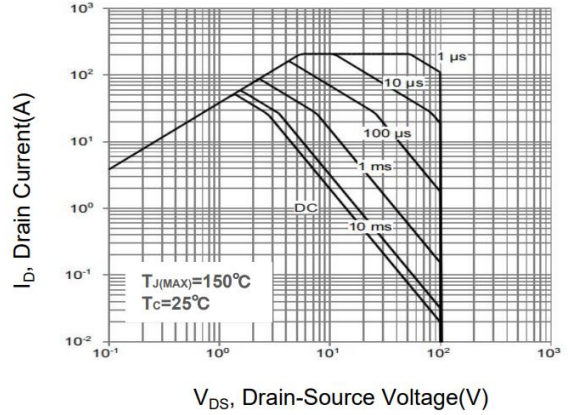


Figure 8. Safe Operation Area


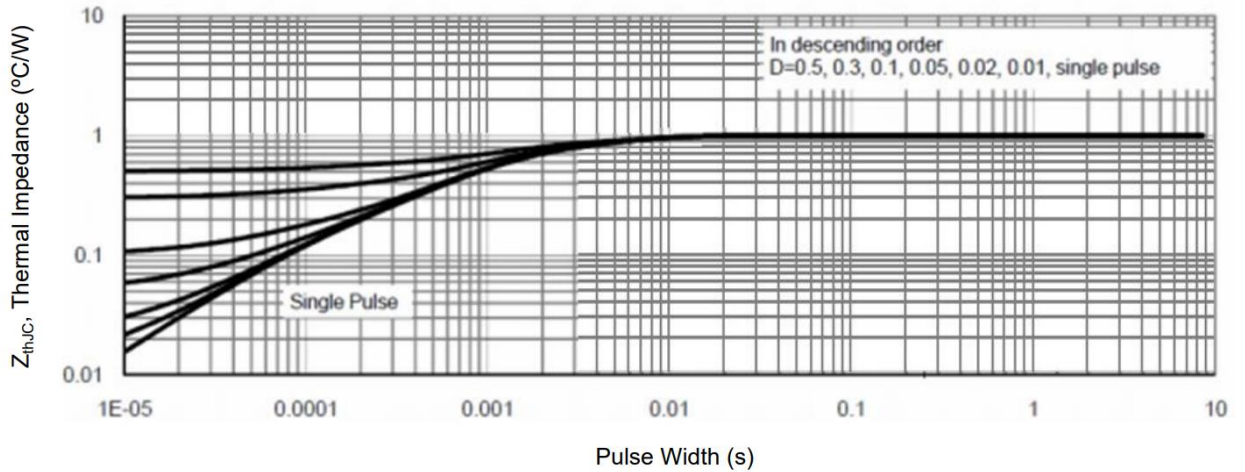


Figure 9. Normalized Maximum Transient Thermal Impedance

Package Outline

Unit : mm

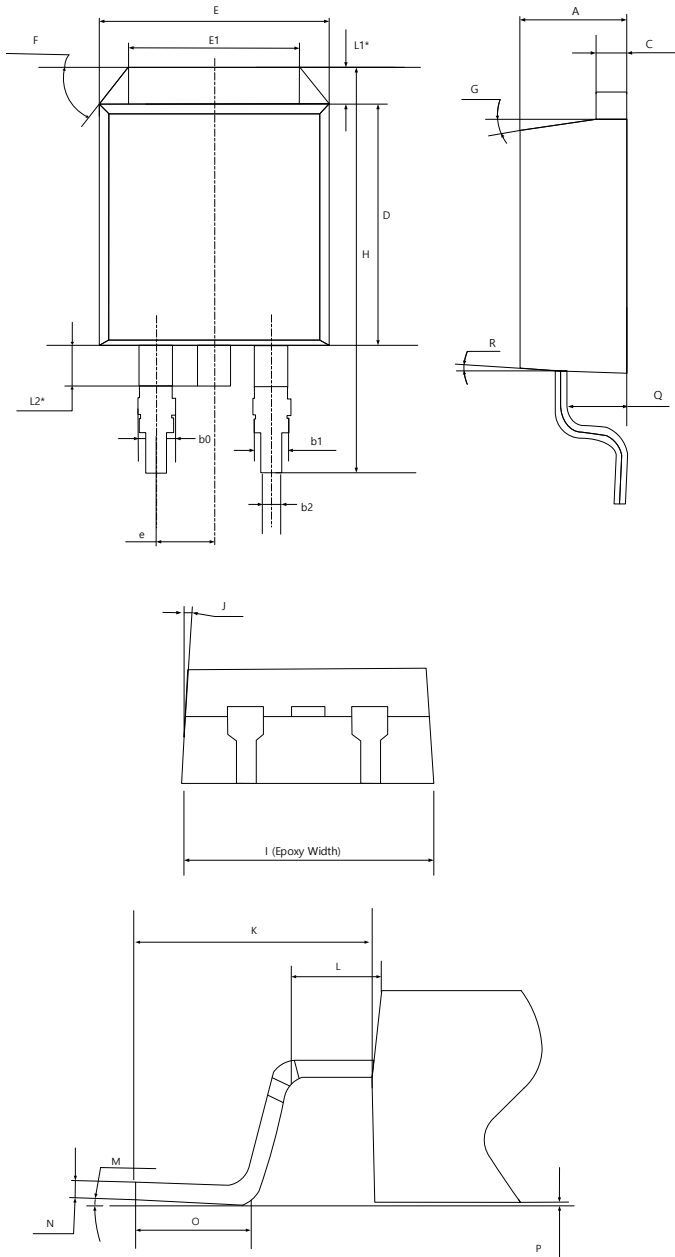

SYMBOL	DIMENSIONS		
	MIN	NOM	MAX
A	4.40	4.60	4.80
b0	1.17	1.37	1.57
b1	1.17	1.27	1.37
b2	0.70	0.80	0.90
C	1.17	1.27	1.37
D	8.50	8.70	8.90
E	9.80	10.00	10.20
E1	6.50	-	-
e	2.44	2.54	2.64
F	-	30° (Ref)	-
G	-	7.0°	-
H	15.00	15.30	15.60
I	9.80	10.00	10.20
J	-	3.0°	-
K	5.00	5.30	5.60
L	1.80	2.00	2.20
L1	1.07	1.27	1.47
L2	1.20	1.50	1.80
M	0.0°	-	8.0°
N	0.30	0.45	0.60
O	2.34	2.54	2.74
P	0	-	0.25
Q	2.37	2.67	2.97
R	-	7.0°	-